

Fast

Easy to install with no additional requirements

Individual

1 Soaker per slate

Cost effective

Cheaper than materials & labour for the lead equivalent



SOAKER SINGLES

HIGH PERFORMANCE SLATE SOAKERS

works as low as
12.5°



Size: 75mm(h)x75mm(w)x350mm(l)

Application: 1 Soaker Single under every abutment slate
40 lengths per box

EASY ROOF SYSTEMS™
PROFESSIONAL PITCHED ROOFING ANCILLARIES



Individual soakers for use with any type of natural or manmade slate

Permavent Ltd, 11 Cumberland Drive, Granby Industrial Estate, Weymouth, DT4 0ND
T: 01305 766 703, F: 01305 766 704, post@permavent.co.uk

www.permavent.co.uk






1. Install Easy Tray eaves protection system (EPS).



2. Install a line of Permatac double sided tape to the abutment wall approx. 50mm above the rafter line.

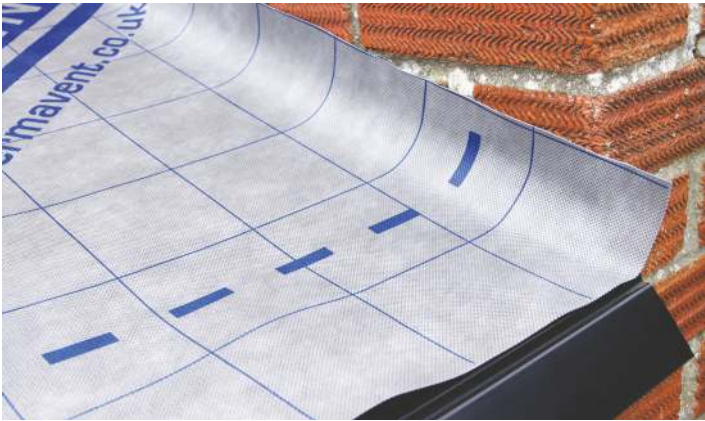


3. Unroll Permavent Breather membrane with a 5mm drape between the rafters. Membrane should be installed in line with and above the fascia. Ensure the membrane goes up the abutment wall by 75mm.



4. Remove Permatac's protective cover and make sure that the membrane is now fully adhered to the abutment wall.



5. Permavent membrane should be stuck to the Easy Tray using the 2XT membranes or Permatac double-sided tape.

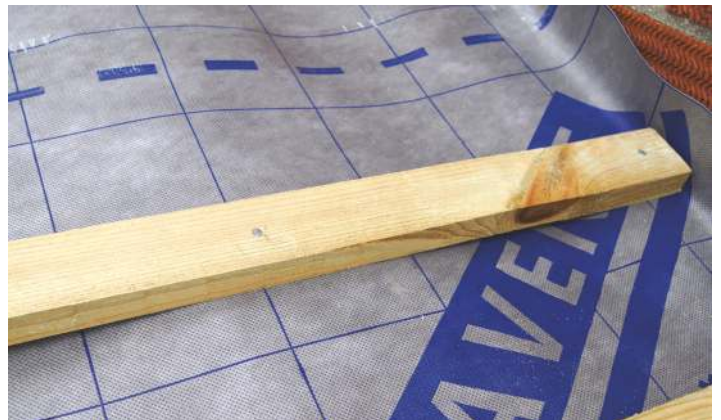

6. Install the roofing battens in the usual way.



7. Install the first eaves course of slate and place the first Soaker Single in place. Then continue to install the first full slate in the usual way.



8. Continue up the roof in the usual way using one Soaker Single for every new course.