



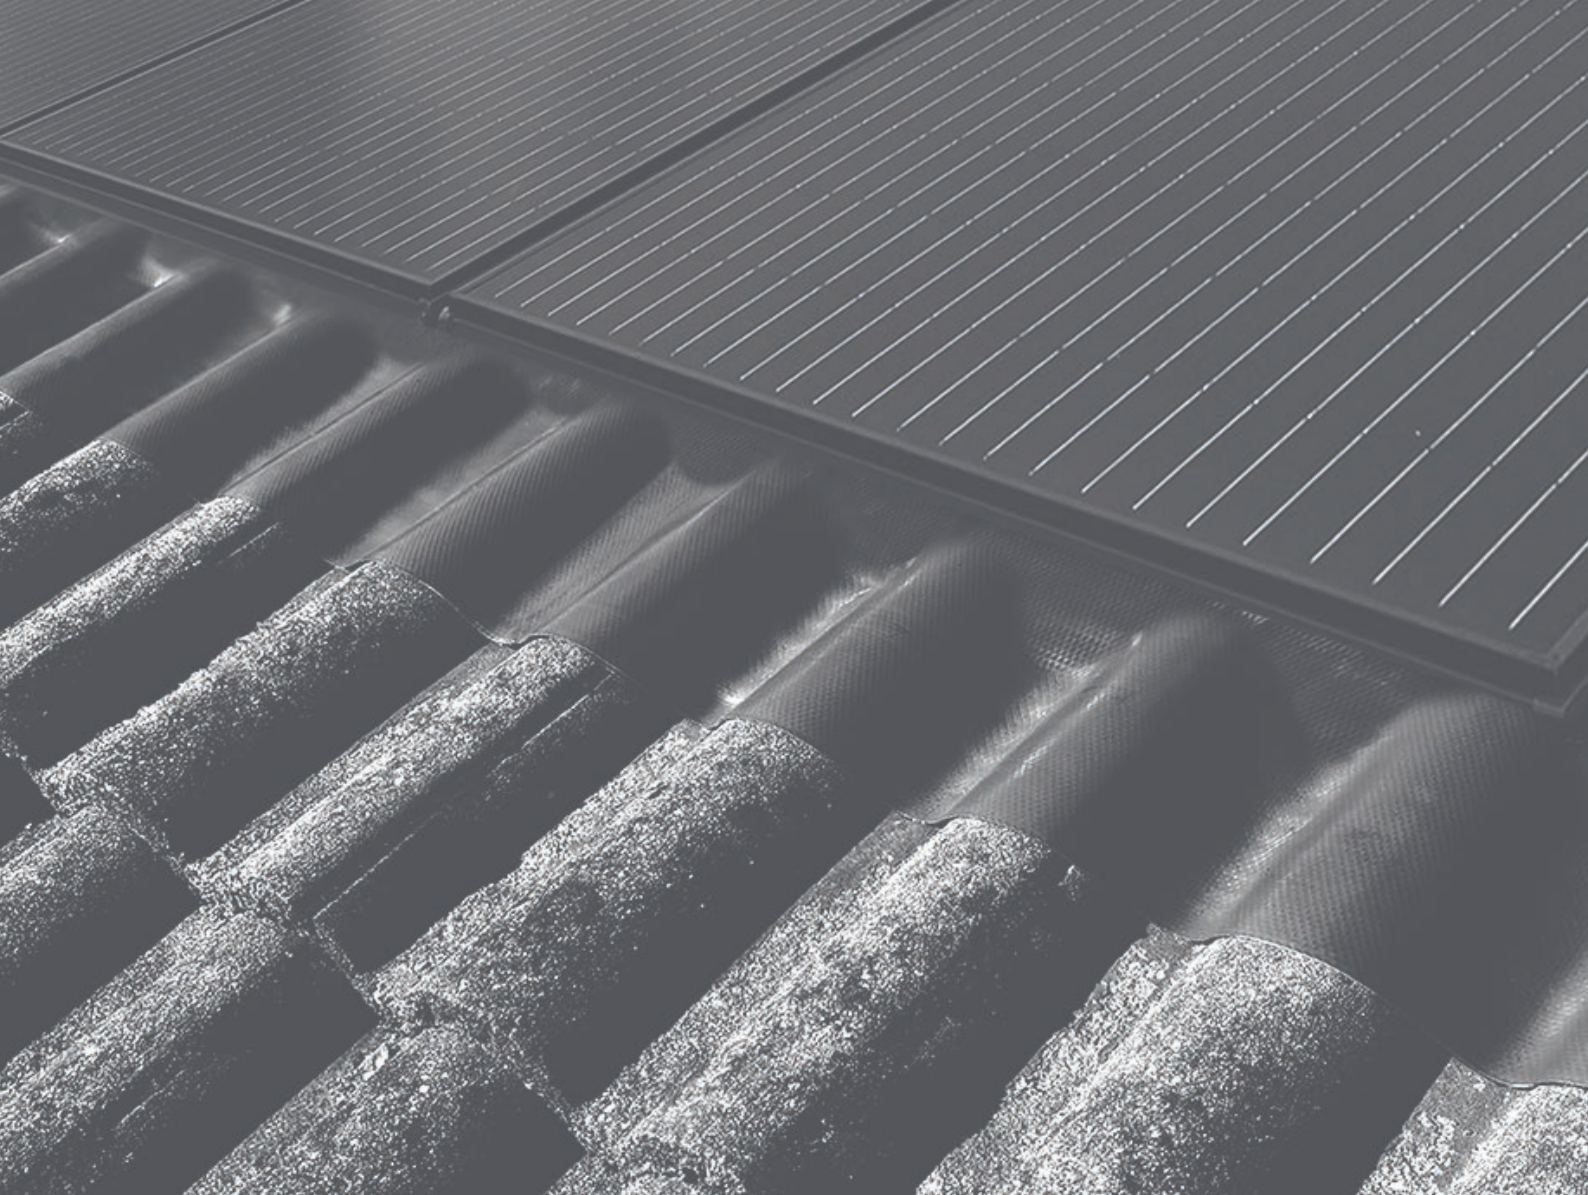

# PERMA<sup>VENT</sup>PERMAFLEX<sup>®</sup>

## PREMIUM LEAD ALTERNATIVE


- ✓ Elongation properties: approximately 46% longitudinal and 31% transverse, allowing conformity to surface profiles
- ✓ Fully adhesive butyl backing, designed to form a secure bond to compatible substrates.
- ✓ Self-welding — requires no additional sealants or heat when overlapping
- ✓ Suitable for dressing into deep-profile tiles and complex roof details
- ✓ Compatible with all common pitched roofing products



STEP FLASHING




ABUTMENT



CHIMNEY FLASHING



SADDLE



SOLAR PANEL



DORMER

PERMA<sup>VENT</sup>

